

UL

Fire Resistance Ratings for Concrete Masonry Units (Design # U936)

Technical Bulletin Overview

For structures using Concrete masonry units (CMU or Block) that require a fire rating to the International Building Code (IBC) or National Building Code of Canada (NBC) please refer to the following designs for masonry made with Elemix Additive used in wall construction.

UL Design # U936
[UL website link click here](#)

Chart 1

Summary of Ratings	
Wall Assembly	
Concrete Block EM-2.0	2hr

Test Protocols

Test for full scale fire resistance ratings were conducted at the ULC- Toronto facility under the supervision of ULC engineers.

Test protocols for the UL rating followed ASTM E119 and ANSI/UL 263 – Standard Test Method for Fire test of Building Construction and Materials.

Test protocols for the ULC rating followed ASTM E119 and CAN/ULC-S101 – Fire Endurance Test of Building Construction and Materials.

THE FOLLOWING PAGES HAVE BEEN REPRODUCED FROM THE UL WEBSITE EVERY EFFORT HAS BEEN MADE TO ENSURE THEIR COMPLETENESS HOWEVER PLEASE REFER TO www.UL.com FOR UP TO DATE INFORMATION



ONLINE CERTIFICATIONS DIRECTORY

UL Online Certifications Directory

[Home](#) [Quick Guide](#) [Contact Us](#) [UL.com](#)

BXUV.U936

Fire Resistance Ratings - ANSI/UL 263

Design/System/Construction/Assembly Usage Disclaimer

- Authorities Having Jurisdiction should be consulted in all cases as to the particular requirements covering the installation and use of UL Listed or Classified products, equipment, system, devices, and materials.
- Authorities Having Jurisdiction should be consulted before construction.
- Fire resistance assemblies and products are developed by the design submitter and have been investigated by UL for compliance with applicable requirements. The published information cannot always address every construction nuance encountered in the field.
- When field issues arise, it is recommended the first contact for assistance be the technical service staff provided by the product manufacturer noted for the design. Users of fire resistance assemblies are advised to consult the general

Guide Information for each product category and each group of assemblies. The Guide Information includes specifics concerning alternate materials and alternate methods of construction.

- Only products which bear UL's Mark are considered as Classified, Listed, or Recognized.


Fire Resistance Ratings - ANSI/UL 263

[See General Information for Fire Resistance Ratings - ANSI/UL 263](#)

Design No. U936

May 12, 2009 Bearing Wall Rating — 2 HR.

Nonbearing Wall Rating — 2 HR.

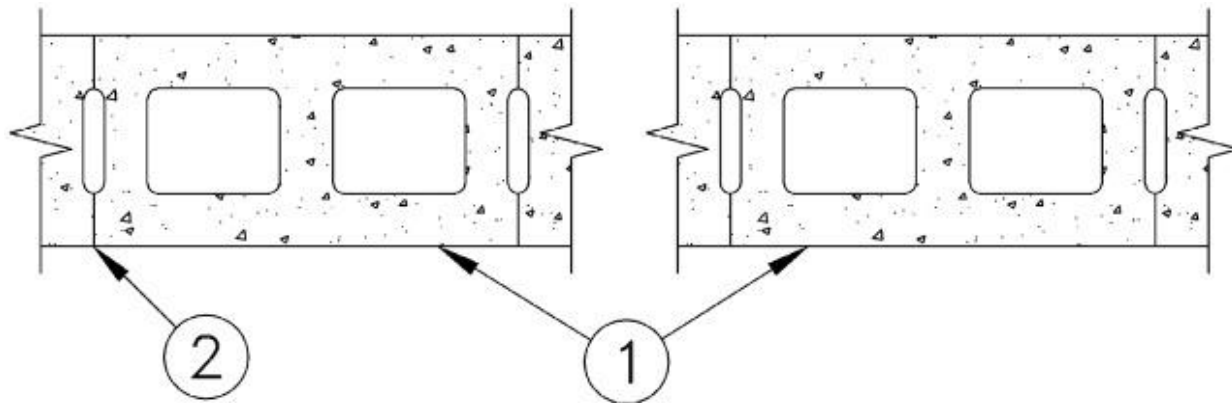

1. **Concrete Blocks*** — Nominal 7 by 7 by 16 in, concrete blocks, 2900 psi compressive strength.

NOVA CHEMICALS INC — EM-2.0 Blocks

2. **Mortar** — Blocks laid in full bed of Type S mortar, nom. 3/8 in. thick. Vertical joints staggered.

*Bearing the UL Classification Mark

Copyright © 2009 Underwriters Laboratories Inc.® The appearance of a company's name or product in this database does not in itself assure that products so identified have been manufactured under UL's Follow-Up Service. Only those products bearing the UL Mark should be considered to be Listed and covered under UL's Follow-Up Service. Always look for the Mark on the product.

UL permits the reproduction of the material contained in the Online Certification Directory subject to the following conditions: 1. The Guide Information, Designs and/or Listings (files) must be presented in their entirety and in a non-misleading manner, without any manipulation of the data (or drawings). 2. The statement "Reprinted from the Online Certifications Directory with permission from Underwriters Laboratories Inc." must appear adjacent to the extracted material. In addition, the reprinted material must include a copyright notice in the following format:

An independent organization working for a safer world with integrity, precision and knowledge.



Elemix® Concrete Additive

Elemix concrete additive utilizes advanced patented polymer technology to consistently deliver lightweight durable concrete at structural strengths. Available globally, Elemix additive provides concrete designers and manufacturers with an edge over the competition. Elemix additive is suitable for any application where lightweight and durability characteristics are important including; ready mix concrete, elevated decks, toppings, grouts and fills and manufactured concrete products, including block and precast building components.

The use of Elemix additive in concrete is covered by one or more of the following U.S. Patent Nos. 7,644,548; 7,648,574; 7,632,348; 7,658,797; 7,666,258.

Global Headquarters

Elemix Concrete Additive
NOVA Chemicals Inc.
1550 Coraopolis Heights Road
Moon Township, PA 15108
P: 412.490.4397

Technical Center

Elemix Concrete Additive
NOVA Chemicals Inc.
400 Frankfort Road
Monaca, PA 15061
P: 724.770.5539

www.elemix.com :: elemix@novachem.com

NOVA Chemicals Inc. is not and cannot be a certified testing laboratory. All information is furnished in good faith, without warranty, representation, inducement or a license of any kind. No guarantee is given that NOVA Chemicals Inc.'s products will be suitable in purchaser's formulations or processes for any particular end use. Materials not manufactured or supplied by NOVA Chemicals Inc. may present hazards in handling and use.

elemix is a trademark of NOVA Chemicals Inc. Elemix® is a registered trademark of NOVA Chemicals Inc.